



## TEST REPORT

No. : SHMR121111617

Date : Dec.18,2012

Page: 1 of 2

SIJIA INDUSTRIAL MATERIAL (SHANGHAI) CO., LTD  
SIJIA INDUSTRIAL PARK, NO.8 QIUZHEN ROAD, CAOJING TOWN, JINSHAN DISTRICT, 201507,  
SHANGHAI, CHINA

The following sample(s) was/ were submitted and identified on behalf of the client as:

Sample Name : PVC FABIRC  
Sample No. : SHMR121111617  
SGS Ref. No. : SP121107252  
Product Specification : 650gsm/R9003  
Manufacturer : SIJIA  
Test Required : UV Exposure  
Ref. standard : ISO 4892-3:2006  
Date of Receipt : Nov.12,2012  
Test Period : Nov.12,2012 to Dec.12,2012

Test result(s) : For further details, please refer to the following page(s)

\*\*\*\*\* To be continued\*\*\*\*\*

Signed for SGS-CSTC Standards  
Technical Services (Shanghai) Co., Ltd

---

Peteson Zhang  
Authorized signatory

## TEST REPORT

No. : SHMR121111617

Date : Dec.18,2012

Page: 2 of 2

Sample Description: White plastic product

Test Condition:

Exposure cycle: ISO 4892-3:2006 cycle 1

Lamp type: UVA-340

8h UV at  $(60\pm 3)^{\circ}\text{C}$  BST,  $0.76\text{W}/(\text{m}^2\cdot\text{nm})$  @ 340nm

4h condensation at  $(50\pm 3)^{\circ}\text{C}$  BST

Exposure period: 672h

Test Result:

Grey scale: 4-5<sup>Note</sup>


Appearance: No other visible change in excess of the above rating.

Note: According to ISO 105-A02:1993/Cor.2:2005, Grey scale is determined under D65 standard light, grade 5 is the best and grade 1 is the worst.

Test Photo:



Original sample

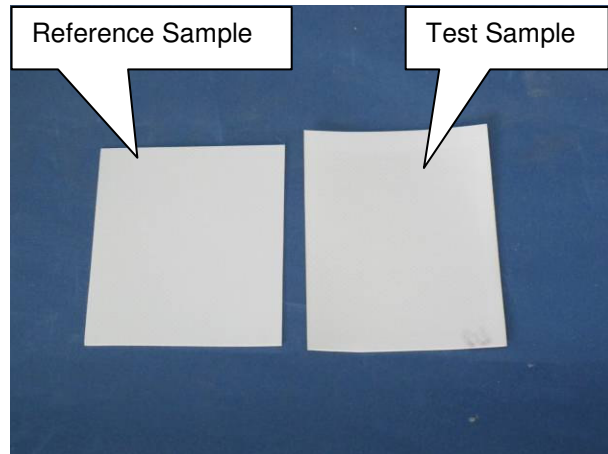

After UV Exposure test

\*\*\*\*\* End of report \*\*\*\*\*